


198.00 EUR
incl. 19% VAT, plus [shipping](#)

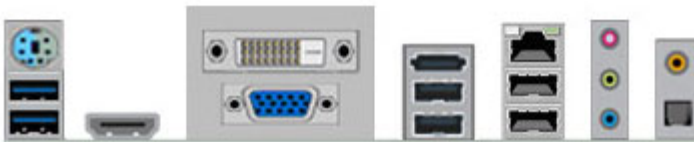

Support:  [Specifications \[EN\]](#)

- Intel® HM67 Express Chipset
- Supports Intel Core™ i3, i5, i7 Mobile Processors
- 2 * SO-DIMM Dual Channel DDR3-1333/1066 up to 16GB
- Intel 82577LM Gigabit LAN
- PCI Express x16 2.0 Slot, PCI Express Mini Card Slot
- Integrated 24-bit Dual Channel LVDS
- 2-ports SATA 6Gb/s & 3-ports SATA 3Gb/s with RAID 0, 1, 5, 10 & JBOD Support
- HDMI, DVI-D, and VGA Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)
- Includes CPU Heatsink/Fan for <35W Processors

CPU

Intel Core i3, i5, i7 mobile processors
Socket G2 (rPGA988B), Includes CPU Heatsink / fan for <35W processors

Chipset / Video

Intel HM67 Express Chipset
Intel HD Graphics (requires compatible CPU with built-in GPU)

Memory

2 * SODIMMs Sockets for un-buffered dual channel
DDR3-1333/1066 up to 16 GB

Expansion Slots	1 * PCI Express x16 2.0 (by 16-lane) slot 1 * PCI Express Mini Card slot
Storage	2 * Serial ATA III 6Gb/s & 3 * Serial ATA II 3Gb/s connectors Support RAID 0,1,5,10
Audio	VIA VT 1705 6-Channel HD Audio
Ethernet LAN	Intel 82577LM Gigabit Ethernet LAN
LVDS	Onboard 24-bit dual channel LVDS connector
USB	Embedded 2 * USB 3.0 & 8 * USB 2.0/1.1
Special Features	Supports ACPI S3, CPU Smart FAN, All solid capacitors Watchdog hardware monitor
Rear Panel I / O	2 * USB 3.0 & 4 * USB 2.0/1.1 ports 1 * PS/2 KB/mouse combo connector 1 * RJ-45 port 1 * HDMI port & 1 * VGA port & 1 * DVI-D port 1 * Audio port (Line-in, MIC and Line-out) 1 * Coaxial Out & 1 * Optical Out
Internal I / O	2 * USB 2.0/1.1 headers for 4 USB ports 1 * 24-bit dual channel LVDS header 1 * Serial header (RS232/422/485) 1 * GPIO header 1 * Audio header, 1 * Front panel header 1 * 24-pin ATX power connector, 1 * 4-pin 12V ATX power connector
BIOS	AMI EFI 32MB SMT Flash ROM
Certificate	CE, FCC, RoHS, EuP
Functional	ATM, Automation, medical Equipment, Security, Digital Signage, POS, General Application, Gaming Machine, Transportation
Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade
Form Factor	Mini-ITX Form Factor (170mm x 170mm)
Product Accessories	
- COM cable	
- Manual	
- CD	
- 1x SATA cable	
- I/O shield	
- CPU fan	
- Thermal grease	