




289.95 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Q470 Chipset !
- Intel vPro tech support !
- Support triple display !
- single 12V DC input !

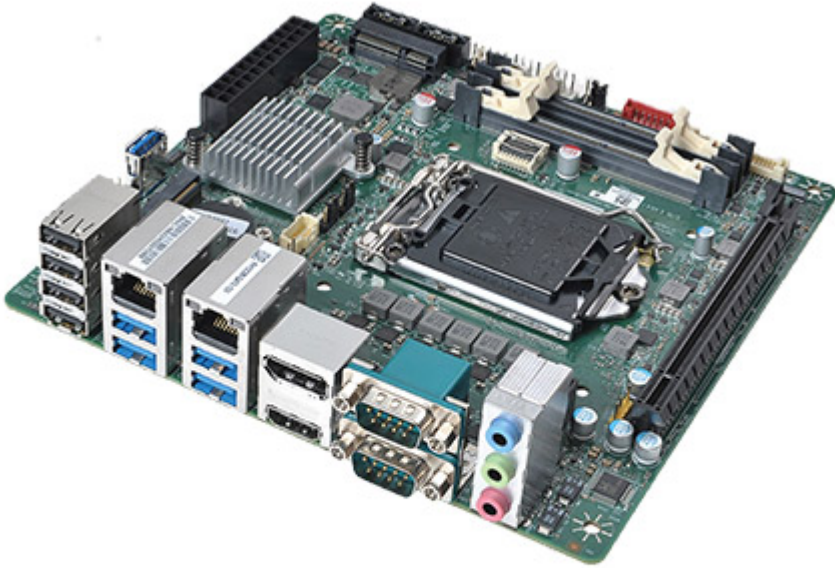

- Up to Intel® Comet Lake 10th i9 35W & i5 95W LGA processor
- Intel® Q470 Chipset
- Intel® vPro technology support
- 2 x DDR4 SO-DIMM up to 32GB
- Support triple display for HDMI, DisplayPort and LVDS/eDP
- 1 x M.2 M 2280, 1 x M.2 E 2230, 1 x mPCIe Full size, 1 x PCIe X16
- 2 x Intel® Gigabit Ethernet
- 12V DC

MECHANICAL

FORM FACTOR

Mini-ITX: 6.7" x 6.7" (170 mm x 170 mm)

SYSTEM	PROCESSOR	10th Gen Intel® Comet Lake LGA1200 Socket Processor / 10core TDP Max 35W / 8ccore TDP 65W / (ATX support 6core 95W)
	CHIPSET	Intel® Q470 (Support RAID 0 / 1 / 5, VPro) / colay H420E
	SYSTEM MEMORY	DDR4 2933/2666/2400MHz / 2 x 260-pin SO-DIMM / Max. 64 GB (Non-ECC)
	GRAPHICS	Intel® HD Graphics
	ETHERNET	Intel® I219-LM Giga LAN + Intel® I210-AT Giga LAN
	AUDIO	Realtek® ALC662 / ALC888
	I/O CHIPSET	Nuvoton NCT6126D(eSPI)
	TPM	Nuvoton NPCT750AAAYX TPM2.0 (Optional)
	EXPANSION SLOT	1 x M.2 2230 E key(PCIe / USB) / PCIe 3.0 X16 slot / M.2 2242 / 2280 M key (PCIe, SATA) / Mini PCIe Full size (PCIe / USB / SATA)
	BIOS	AMI BIOS / 256 Mbit SPI
GRAPHICS	H/W MONITOR	Temperature Monitor / Voltage Monitor / Fan Monitor
	WATCHDOG TIMER	1~255 steps by software program
	SMART FAN CONTROL	CPU Fan / System Fan
	2nd DISPLAYPORT	-
	VGA	-
	DVI	-
	HDMI	Up to 4K (4096 x 2160) @30 Hz
	DISPLAYPORT	Up to 4K (4096 x 2304) @60 Hz
	LVDS	Up to 1920 x 1200 @60 Hz
	eDP (Option)	Up to 4K (4096 x 2304) @60 Hz
REAR I/O	USB	4 x USB 2.0 / 4 x USB 3.2 Gen 2 (Q470)
	DISPLAY I/O	1 x HDMI 1.4 / 1 x DisplayPort 1.2
	AUDIO I/O	1 x Mic-in / 1 x Line-out / 1 x Line-in
	LAN I/O	2 x RJ-45
	SERIAL PORT	2 x RS232 (one support RS422,/485)
	PS/2 PORT	-
	OTHERS	-
	STORAGE	2 x SATAIII
	USB	1 x USB 3.0 / 2 x USB 2.0
	DISPLAY I/O	1 x LVDS (*Optional eDP SKU available) / 1 x Backlight Connector
INTERNAL CONNECTORS	AUDIO I/O	-
	SERIAL PORT	-
	PARALLEL PORT	-
	GPIO	1 x MiAPI Header (Programmable. Support 10-bit GPIO)
	FAN	1 x 4-pin CPU Fan Header / 1 x 4-pin System Fan Header
	POWER	1 x ATX Power Connector / 1 x AT / ATX Mode Select Jumper / ATX 12V Power Connector (24-pin + 4-pin)
	OTHERS	1 x CMOS Jumper / 1 x Front Audio Header (Mic-in & Line-out) / 1 x panel power select header / 1x buzzer header / 1 x SPDIF

POWER REQUIREMENT	POWER INPUT	ATX 24-pin + 4-pin / 12V DC (3pin terminal connector via cable by connecting to ATX 24-pin + 4-pin)
ENVIRONMENTAL	OPERATING TEMPERATURE	0 ~ 60°C (32 ~140°F)
	STORAGE TEMPERATURE	-40 ~ 85°C (-40 ~185°F)
	OPERATING HUMIDITY	10% ~ 95% R/H (Non-condensing)
OS	CERTIFICATION	CE / FCC Class B
	OS SUPPORT	Windows® 10 64-bit / Linux (support by request)
PACKING LIST	PACKAGE	1 x Motherboard / 1 x 50 cm SATA Cable / 1 x Quick Installation Guide / 1 x I/O Bracket (Full Height) / 1x 3pin terminal connector female to 24p ATX + 4pin ATX + SATA power convert cable (12v sku)