


398.00 EUR
incl. 19% VAT, plus [shipping](#)

- LGA1151 !
- 2x COM !
- 2x LAN !
- Micro ATX Format !

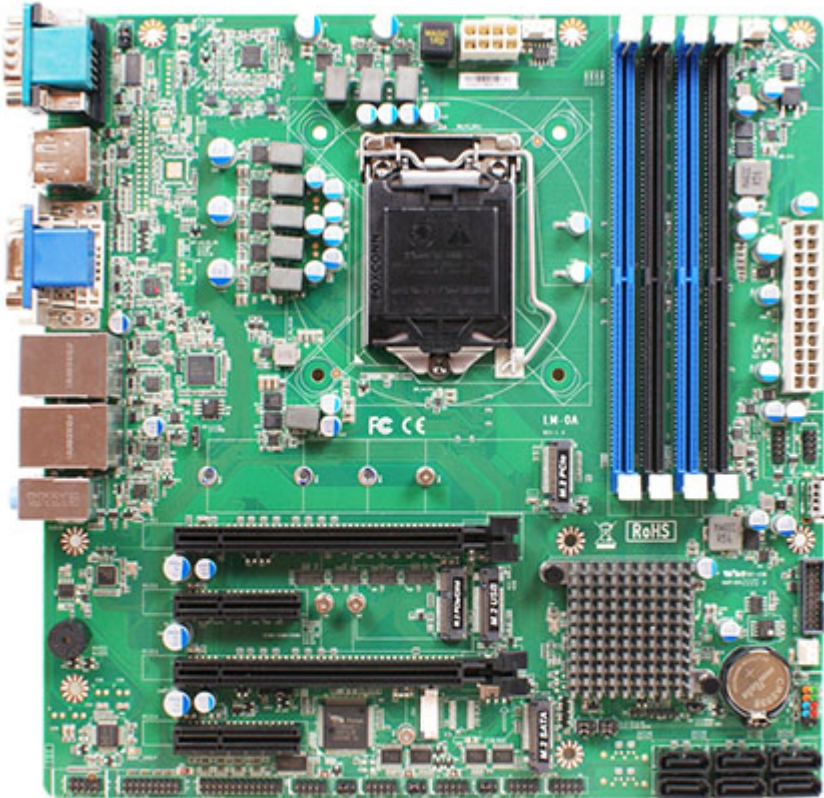

Support: [Datasheet](#)

- Intel® LGA1151 Socket supports 9th/8th Gen. Core Processor (Max 95W)
- Intel® Coffee Lake-S Q370 Chip
- Support 4* DDR4 2666/2400/2133MHz up to 128GB
- 1* Intel® I219-V GbE + 1* Intel® i210AT GbE
- 6* SATA III (6Gb/s) & 2* M.2 (M key), 1* M.2 (E key) supports CNVi, 2* PCI-E x16, 2* PCI-E x4
- VGA/DVI-D/HDMI/DP/LVDS Output
- 2* RS232/422/485 (COM1/2), 4*RS232
- 5* USB3.1, 6* USB2.0
- ATX Power Input
- Micro ATX Form Factor (244 x 244 mm)

Model	
Model	– JLM-0A1
Form Factor	
Form Factor	– Micro ATX (244 x 244 mm)
Processor System	
Processor/CPU	– Intel® LGA1151 Socket supports 9th/8th Gen. Core Processor (Max 95W) – Intel Q370 chipset – AMI 128Mb Flash ROM BIOS
Memory	

Memory	– 4* Long DIMM DDR4 2666/2400/2133 MHz DRAM up to 128GB
Expansion Slot	
Dimensions	<ul style="list-style-type: none"> – 2* M.2 (M key): 1* 2242/2280/22110 (support NVMe), 1* 2242 (SATA interface, co-lay SATA6) – 1* M.2 (B key, 3042/3052) support 3G/4G/5G Module – 1* M.2 (E key, 2230) support CNVi – 6* SATAIII (SATA6 co-lay M.2 2242, support RAID 0/1/5/10) – 2* PCI-E x16 – 2* PCI-E x4 – 1* SIM card holder (Nano)
Graphics	
Graphics	<ul style="list-style-type: none"> – Intel® HD Graphics, shared memory – 1* VGA (Max Resolution: 1920x1200@60Hz, Co-lay LVDS) – 1* LVDS (Max Resolution: 1920x1200@60Hz, Co-lay VGA, Option) – 1* HDMI 1.4 (Max Resolution: 4096x2304@24Hz) – 1* DVI-D (Max Resolution: 4096x2304@24Hz) – 1* DP (Max Resolution: 4096x2304@60Hz) – Support Triple Displays
Ethernet	
Ethernet	<ul style="list-style-type: none"> – 1* Intel® I219-V GbE – 1* Intel® i210AT GbE
Audio	
Audio	– HD audio: Realtek ALC662VD
I/O Port	
Rear I/O	<ul style="list-style-type: none"> – 1* VGA – 1* DVI-D – 1* HDMI – 1* DP – 2* RJ45 – 4* USB3.1 – Line-in, Line-out, MIC – 1* RS232/422/485 (support 5/12V TTL) – 1* PS/2
Internal I/O	<ul style="list-style-type: none"> – 1* USB 3.0 (Gen.1) – 5* USB 2.0 – 1* USB 2.0 (Erect) – 1* LVDS (Co-lay VGA) – 5* COM (COM2: RS232/422/485, COM3/4/5/6: RS232, COM2/3/4: Support 5/12V TTL) – 6* SATAIII (6.0Gb/s, SATA6 co-lay M.2 M key) – 4* M.2 (2* M key, 1* E key, 1* B key) – 1* Parallel – 1* GPIO (16 bit) – 1* Chassis intrusion – 1* Audio Header – 1* SMBUS/I2C – 1* AT mode – 1* TPM2.0 (Option)
SATA	
SATA	– 6* SATAIII (6.0Gb/s, support RAID 0/1/5/10)
Watchdog Timer	

Watchdog Timer	<ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments (10sec ~ 255min)
Power	
Power	<p>ATX PWR (8+24 pin)</p> <ul style="list-style-type: none"> - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Compliance	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C ~ 60°C
	- Storage: -20°C ~ 85°C