


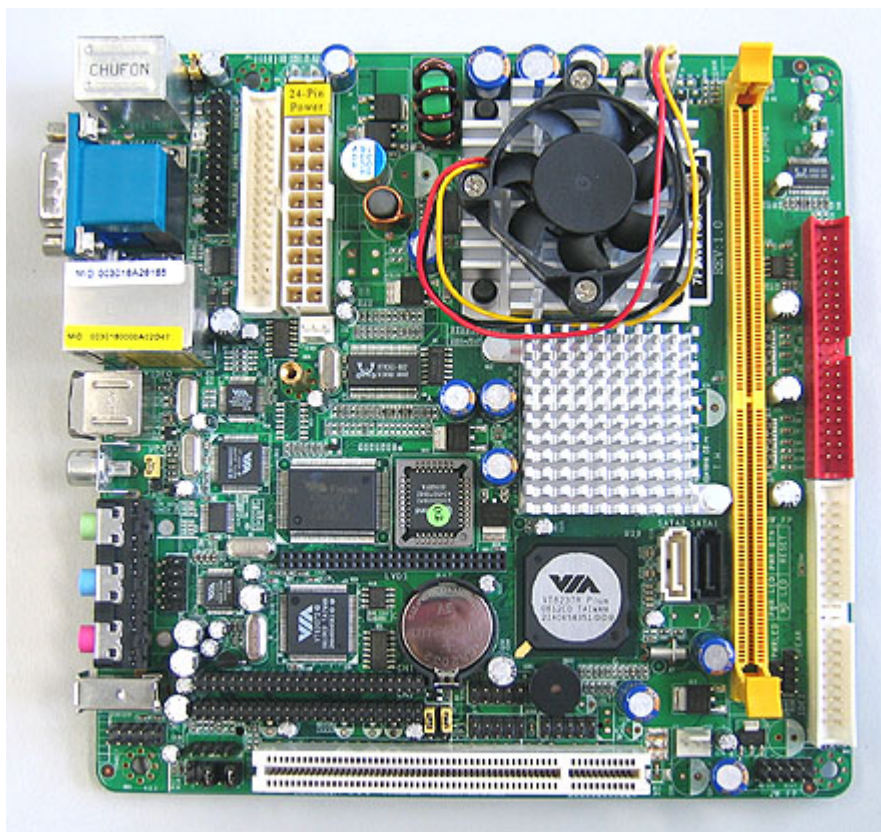

149.00 EUR  
incl. 19% VAT, plus [shipping](#)

- VIA C7 NanoBGA CPU
- 2.0 Ghz !
- DDR-II !
- 20W

This board is based on the latest VIA C7 architecture.

| 7F2WE-2G-OC Specifications |                                       |
|----------------------------|---------------------------------------|
| Processor                  | VIA C7 2.0 GHz processor              |
| Chipset                    | VIA CN700 north bridge                |
|                            | VIA VT8237R south bridge              |
| System Memory              | 1 DDR2 400/533 DIMM                   |
|                            | Up to 1GB memory size                 |
| VGA                        | Integrated VIA UniChrome AGP graphics |
| Expansion Slots            | 1 PCI                                 |
| Onboard IDE                | 4 Ultra DMA 133                       |
| Onboard Serial ATA         | 2 SATA connectors                     |
| Onboard Floppy             | 1 Floppy Port                         |
| Onboard USB                | 8 USB 2.0                             |
| Onboard LAN                | VIA 6103 10/100                       |
| Onboard Audio              | ALC655 6 channel AC'97 codec          |
| Onboard TV Out             | VIA VT1622A TV encoder                |
| Onboard 1394               | IEEE 1394                             |

|                                |                                                                                                                                                                                                                                             |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Back Panel I/O                 | <p>1 1394</p> <p>1 RCA video</p> <p>1 VGA port</p> <p>2 USB 2.0</p> <p>1 LAN port</p> <p>2 IEEE 1394 ports</p> <p>1 serial ports</p> <p>1 PS2 mouse port</p> <p>1 PS2 keyboard port</p> <p>3 audio jacks: line-out, line-in, and mic-in</p> |
| Onboard I/O Connectors         | <p>3 USB 2.0 connectors for 6 USB ports</p> <p>1 parallel port</p> <p>1 VGA port</p> <p>2 serial ports</p> <p>1 PS2 keyboard connector</p> <p>1 PS2 mouse connector</p> <p>1 floppy port</p> <p>Line-in/out/MIC audio ports</p>             |
| BIOS                           | Award BIOS LPC 4Mbit Flash memory                                                                                                                                                                                                           |
| System Monitoring & Management | <p>CPU temperature</p> <p>Modem ring wake up</p> <p>RTC Alarm</p> <p>Keyboard power on</p> <p>System temperature</p> <p>System voltage</p> <p>Fan speed</p>                                                                                 |
| Operating Humidity             | 0% - 95% (relative humidity; non-condensing)                                                                                                                                                                                                |
| Form Factor                    | Mini-ITX (17cm x 17cm)                                                                                                                                                                                                                      |
| Includes                       | <p>ATA 133 flat cable (40 wire, 80 conductor, 3 connectors)</p> <p>CD</p> <p>SATA Cable</p> <p>Floppy Cable</p>                                                                                                                             |